




STATIC PRESSURE CONTROL


INCLUDED WITH THE ECOJAY MODULATING BYPASS DAMPER, THE ASPC3 IS A PRE-WIRED PRESSURE SWITCH THAT QUICKLY INSTALLS TO CONTROL ANY 24V DAMPER OR OTHER ACCESSORY. MODULATING (STATIC PRESSURE CONTROLLED) BYPASS DAMPERS SHOULD BE USED WHERE RELIABILITY AND QUIET OPERATION ARE NEEDED. THIS METHOD PROVIDES THE MOST ACCURATE AND EFFICIENT VERSION OF PRESSURE RELIEF IN THE SUPPLY DUCT FOR ANY ZONING SYSTEM.

- **PRE-WIRED FOR FASTED BYPASS INSTALLATION**
- **SIMPLE KNOB ADJUSTMENT**
- **BEST PRESSURE RANGE FOR RESIDENTIAL AND LIGHT COMMERCIAL SYSTEMS**
- **NO GUESSING HOW TO WIRE A BYPASS**
- **HIGH DURABILITY PLASTICS, MADE TO LAST IN ATTICS & BASEMENTS**

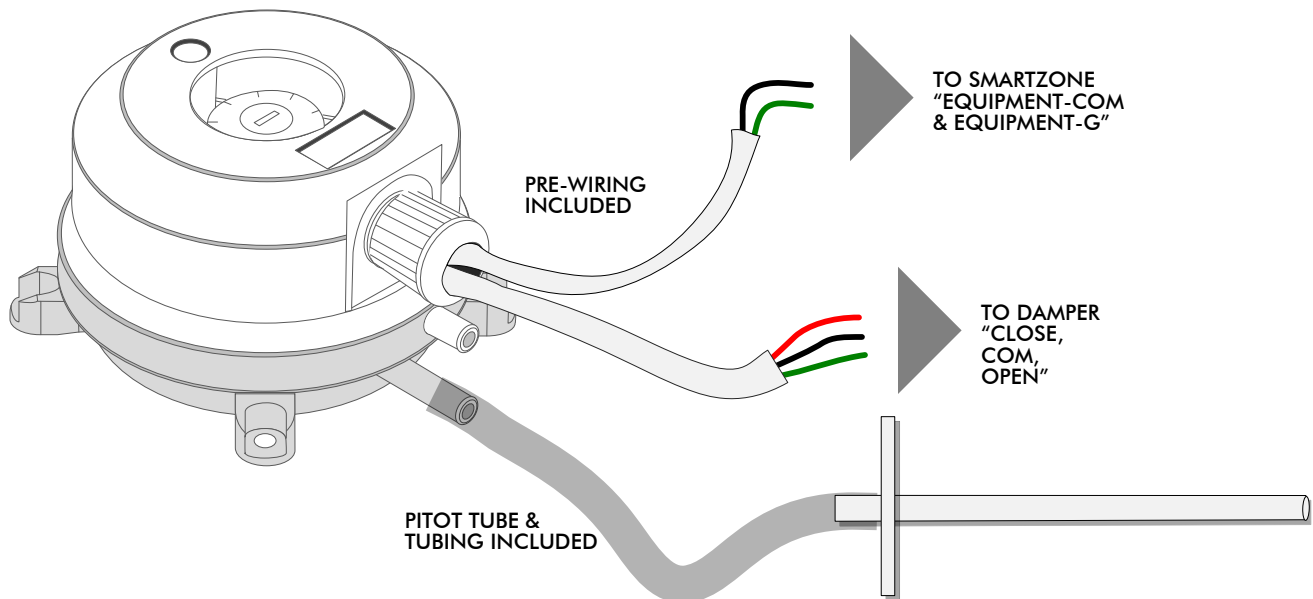

SPECIFICATIONS

SET POINT RANGE	0.08" w.c. TO 0.80" w.c. (20 TO 200 PA)
PRESSURE CONNECTIONS	P1 (+) HIGH PRESSURE P2 (-) LOW PRESSURE
SWITCHING DIFFERENTIAL	5PA (0.02" w.c.)
MAXIMUM PRESSURE	10KPA
OPERATING TEMPERATURE	-4 °F TO +140 °F
ELECTRICAL RATING	1.0 A MAX
ELECTRICAL CONNECTIONS	1 NO – NORMALLY OPEN 2 NC – NORMALLY CLOSED 3 COM – POWER SUPPLY
CONDUIT CONNECTION	½" NPT THREADED
SAMPLE LINE CONNECTIONS	¼" ID TUBING



MOUNT WITH PITOT TUBE INPUTS FACING DOWN FOR BEST RESULTS



ECOJAY PRODUCTS LIMITED WARRANTY