




TEMPERATURE SENSOR SUPPLY

INCLUDED WITH THE ECOJAY SMARTZONE-2X & 4X (OPTIONAL WITH 2L), THE ASAS IS A PRE-WIRED TEMPERATURE SENSOR MADE TO WORK WITH THE SMARTZONE PRODUCT LINE.

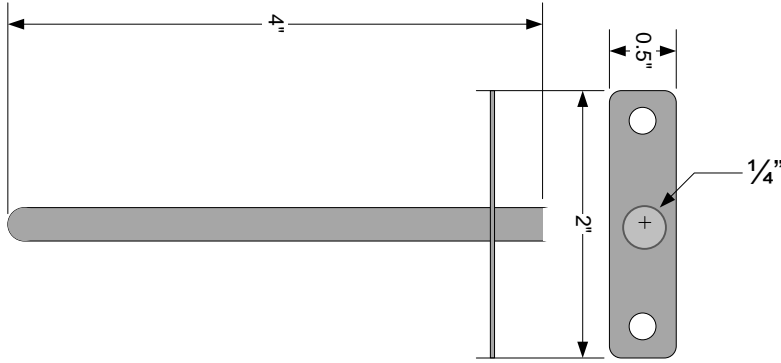


SPECIFICATIONS

MOUNTING	MOUNT SECURELY IN ANY ORIENTATION (VERTICAL, HORIZONTAL OR DIAGONAL)
ACCURACY RANGE	0°C TO 100°C
ACCURACY	+/- 0.5°F
CASING	STAINLESS STEEL
AMBIENT RESISTANCE	10 KΩ +/- 2.5% @ 25°C
SENSOR TYPE	10K, TYPE III
MAX TEMP DISPLAY	199°F OR 199°
ENVIRONMENTAL DIMENSIONS	MOISTURE RESISTANT
MOUNTING DIMENSIONS	LENGTH: 4.0" DIAMETER: 0.25"
MOUNTING DIMENSIONS	PLATE: 2" X 0.5" HOLES: 1/4" DIAMETER (1.5" CENTER TO CENTER)


INSTALLATION

INCLUDED WITH SMARTZONE-2X & SMARTZONE-4X
ASAS

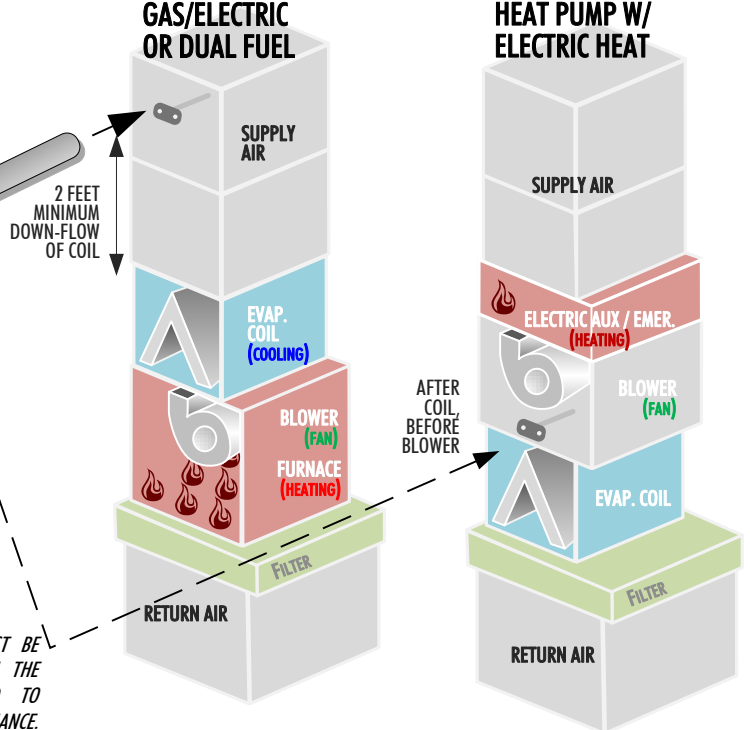

ADDITIONAL WIRE LENGTH CAN BE ADDED TO THE EXISTING ASAS WIRE LEAD UP TO A TOTAL OF 100 FT COMBINED LENGTH.

- REMOVE THE GREEN PLUG CONNECTOR AND USE SOLDER OR WIRE NUTS TO CONNECT 18 GAUGE WIRE TO THE EXISTING WIRE LEADS ATTACHED TO THE ASAS.

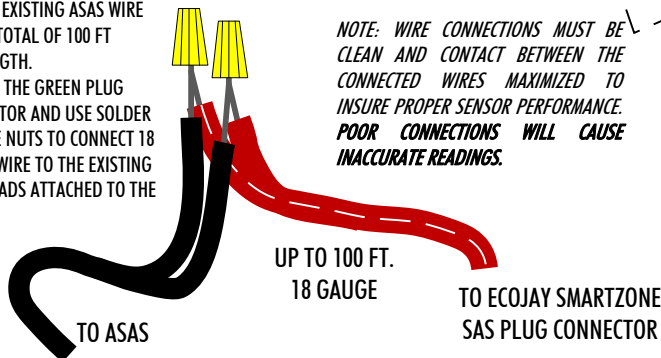

NOTE: WIRE CONNECTIONS MUST BE CLEAN AND CONTACT BETWEEN THE CONNECTED WIRES MAXIMIZED TO INSURE PROPER SENSOR PERFORMANCE. POOR CONNECTIONS WILL CAUSE INACCURATE READINGS.

